


automotive

industrial

wood

VALUE PACK BOOTHS

- **ECONOMICALLY PRICED**
- **MINIMUM SHOP SPACE REQUIRED**
- **EASY TO INSTALL**
- **MEETS ALL QUALITY CODE STANDARDS**

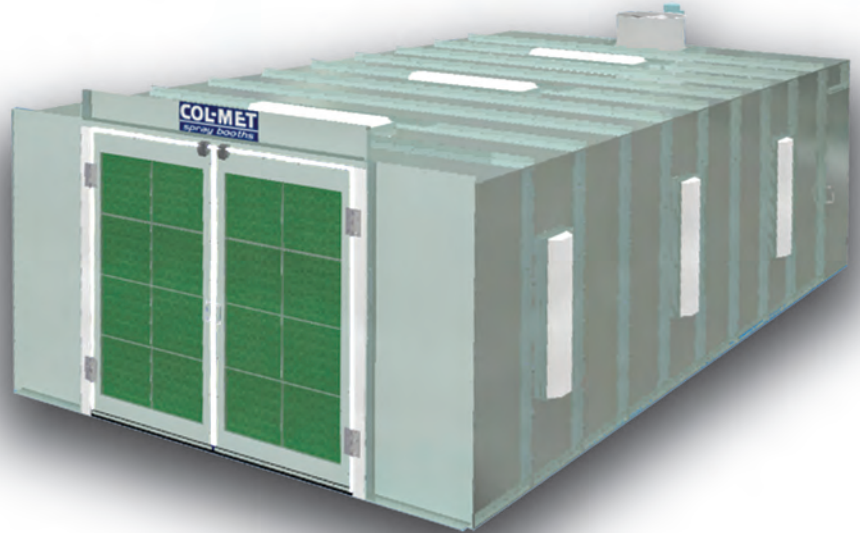

This Col-Met Value Pack Booth is a very affordable filtered air enclosure that is well-lit and designed to fit in very close shop areas. The booth is a crossdraft design that intakes fresh air through filters in the product entry doors. The clean, filtered air is then drawn across the length of the booth and exhausted through filters at the back.

LIGHTING FEATURES

Bright, full booth illumination is provided by nine 48" four-tube, 32-watt fluorescent light fixtures. The lights are mounted in the side walls and ceiling panels behind clear, tempered safety glass and sealed with a gasket. All fixtures are UL listed and approved for their intended use and placement.

INSTALLATION

Installation is easy. The booth is a series of panels with external pre-punched flanges that are bolted together and specifically designed to enable the end user to add or subtract length, one 2'-6" section at a time.

Product and personnel door hinges are bolted in place to their adjacent doors and panels. All hardware, filters and sealants needed are included. Complete, step-by-step installation instructions are furnished with each spray booth unit.

CONSTRUCTION FEATURES AND QUALITY STANDARDS

- Booths are constructed from 18 gauge, prime-quality galvanized steel
- All panels and support members are precision punched for easy nut and bolt assembly
- Quality brand-name tubeaxial fans and ODP motors
- 5/16" inch bolts with self locking nuts
- Industry-leading light levels
- Spray booth specific, dual voltage T-8 32-watt light fixtures
- Booths include installation instructions, fan, motor & drive, fasteners, hardware, and sealant necessary for assembly
- Personnel access doors are pre-hung in a heavy gauge galvanized steel frame for easy installation
- Product doors are field hung to facilitate installation on uneven floors
- Brixon™ latches are provided for each door opening
- Fan panel reversible for top or rear exhaust
- Control panel and other electric components can be purchased separately





OPTIONAL CONTROL PANEL



COL-MET SPRAY BOOTHS COMPLY WITH ALL APPLICABLE OSHA AND NFPA REGULATIONS.

VALUE PACK BOOTHS

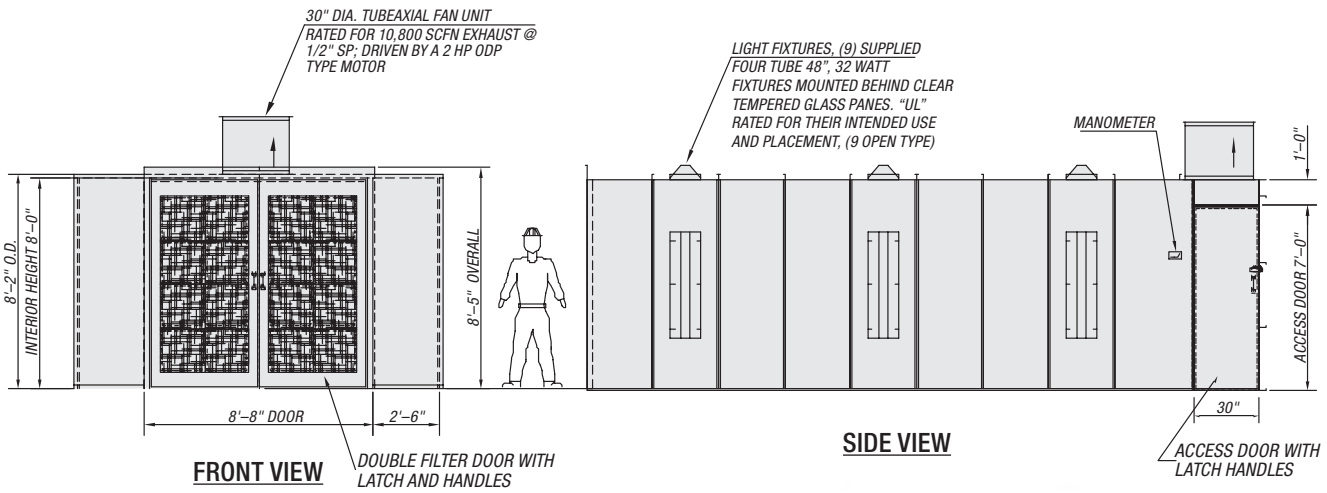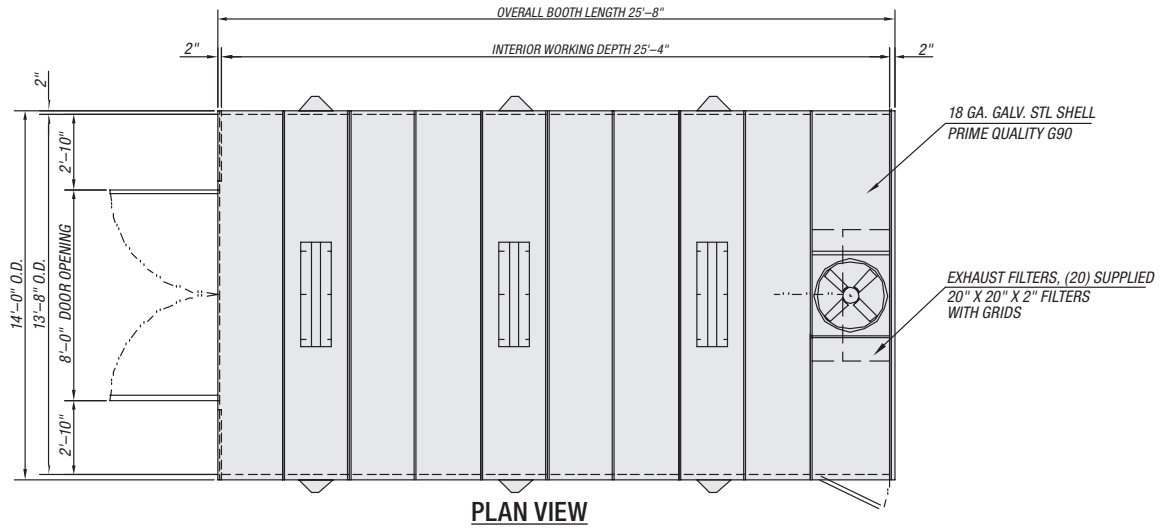

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening		Light Open	Air Flow SCFM	Fan Spec.		Filters			
	Width	Height	Length	Width	Height	Length		Width	Height			Qty	Type	Dia.	HP	Int.	Exh.
VP-15-SB	13'-8"	8'-0"	15'-4"	14'-0"	8'-2"	15'-8"	1	8'-8"	8'-0"	1	Filter	6	10,800	30"	2HP	16	2
VP-25-SB	13'-8"	8'-0"	25'-4"	14'-0"	8'-2"	25'-8"	1	8'-8"	8'-0"	1	Filter	9	10,800	30"	2HP	16	20
VP-27-SB	13'-8"	8'-0"	27'-10"	14'-0"	8'-2"	28'-2"	1	8'-8"	8'-0"	1	Filter	9	10,800	30"	2HP	16	20
VP-30-SB	13'-8"	8'-0"	30'-4"	14'-0"	8'-2"	30'-8"	1	8'-8"	8'-0"	1	Filter	9	10,800	30"	2HP	16	20



Col-Met Spray Booths
Dallas, TX // e-mail: sales@colmetsb.com
Toll-free: 888.452.6684 // www.colmetsb.com